

株洲宏大高分子材料有限公司

ZHUZHOU HONGDA POLYMER MATERIALS CO., LTD

为用户在高功能塑料领域提供最具价值的整体解决方案 The supplier of overall solutions in the field of high-performance plastics



1中心管系列/Permeate Pipe▶▶▶

★工业中心管系列/for industrial

产品概述


Products Introduction

产品原材料为进口优质食品级ABS,整个加工过程符合食品级卫生要求。其内外表面光亮、清洁、无杂质;超高直线度和加工精度;长度尺寸稳定可控。

The raw material is food grade of ABS, and the whole process comply with food hygiene requirements. Its inner and outer surface are bright, clean, free of impurities, with good straightness and machining precision. The length and size are stable&controllable.

技术参数

Technical Specification



型号 Model	8040	4040	4025	4021	2514
D(mm)	38.7	19.5	19.5	19.5	19.5
d(mm)	27	12.7	12.7	12.7	12.7
L(mm)	1016	1016	635	533	356



★家用中心管系列/for household

产品概述


Products Introduction

产品原材料为进口优质食品级ABS,整个加工过程符合食品级卫生要求。产品采用一次性注塑成型,尺寸稳定,外表加以精致火花纹处理。产品端部形状有六角型和U槽型两种不同结构方式供您选择。

The raw material is food grade of ABS, and the whole process comply with food hygiene requirements. The product adopts one-time injection molding, with stable size. The appearance is processed by exquisite spark. For product end, there are two types structure for choice: Hexagonal or U shape.

20.00	100	-	and.
技	*	 	350
134	~~	-	ч.

Technical Specification



型号 Model	3013	1812	1810			
D(mm)	17	17	17			
d(mm)	10. 2	10. 2	10. 2			
L(mm)	333	298	256			
形状 Shape	六方或U槽可选 Hexagonal or U shape					



2连接器系列/Connector ▶▶▶

产品概述

Products Introduction


产品原材料为进口优质食品级ABS,整个生产加工过程符合食品级卫生要求。各款连接器可与密封圈成套提供。

The raw material is food grade of ABS, and the whole process comply with food hygiene requirements. Each connector can be provided with a sealing ring.

技术参数

Technical Specification





型号 Model	8.0"	4.0"
D(mm)	28.4	32
d(mm)	19	19. 1
L(mm)	147	51

名称 Name	颜色 Colour	适用温度℃ Suitable temperature	变形温度°C Deformation temperature	熔化温度℃ Melting temperature	化学性能℃ Chemical properties
PSU	琥珀色 Amber	-100~175	170~185	330~360	稳定性好,耐温、耐强酸碱 Good stability, temperature resistance, strong acid and alkali resistance
ABS	米黄色 Beige	-40~85	80~95	210~260	韧性好,耐冲击,无毒 Toughness, impact resistance, non-toxic
PC	透明 Transparent	-45~135	130~145	271~293	耐弱酸碱 Weak acid and alkali resistance


3浓水隔网系列/Spacer Net ▶▶▶

产品概述

Products Introduction

滤网(PP浓网)产品采用专用模具以固定角度丝状网格缠绕成型。产品网格角度一致,克重均匀,丝束较细,质地柔软。并有多种尺寸规格可供客户选择,外形宽度可根据客户要求定制。

The mesh (PP thick mesh) is filamentous grid-winded by a special mould in fixed angle. The angle of the grid is consistent, it has uniform gram and soft property. There are many specifications to choose for customer, the width can customize according to customer's requirements.



技术参数

Technical Specification

厚度(mils) Thickness	17	20	22	24	26	27	28	30	31	32	34	36
股数(/inch) Strands	16	16	16	9	16	9	9	9	9	9	9	9

4端盖系列/End Cap▶▶▶

产品概述

Products Introduction


产品原材料为进口优质食品级ABS,整个加工过程符合食品级卫生要求。产品采用一次性注塑成型,尺寸稳定,外表光亮,无瑕疵。产品装配位置内孔"d"尺寸可根据客户要求选择,可松可紧。

The raw material is food grade of ABS, and the whole process comply with food hygiene requirements. It is made by one-time injection molding, with stable size, bright appearance and no defects. The size for assembly position hole "d" can be maded by customer requirements, and it's flexiable.



技术参数

Technical Specification

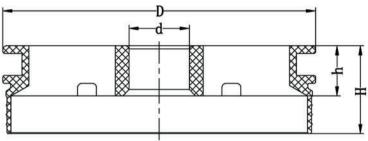

型号 Model	8.0"	4.0"	2.5"
D(mm)	200.2	99.7	61
d(mm)	38.1	19. 2	19. 2
H(mm)	36	28	25
h(mm)	27	16	13.5



5橡胶密封圈/Rubber Seals▶▶▶

产品概述

Products Introduction

根据客户需求,我司提供与中心管,端盖及连接器配套使用的橡胶 密封圈。

According to customer's requirements, we provide rubber seals which used for matching permeate tubes, end caps and connectors.

